


GoodWe Wi-Fi

Handleiding instellen van Wi-Fi op een GoodWe omvormer


Stap 1

Open de wifi instellingen op uw telefoon, tablet of laptop. Verbind met het Wi-Fi netwerk "Solar-WiFi". Als u gevraagd wordt om een wachtwoord kunt u "12345678" gebruiken.

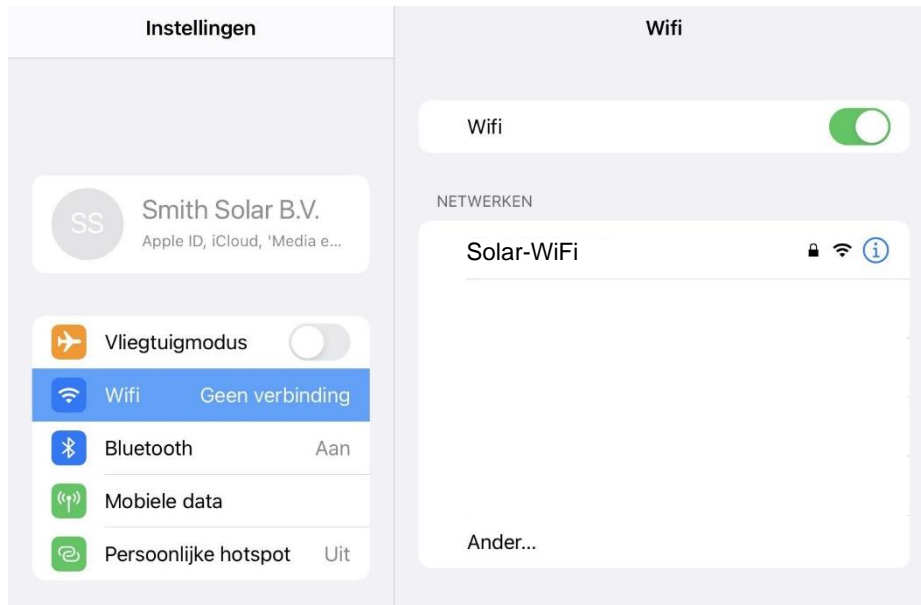


Stap 2

Open de internet browser op je apparaat en typ in de adresbalk 10.10.100.254

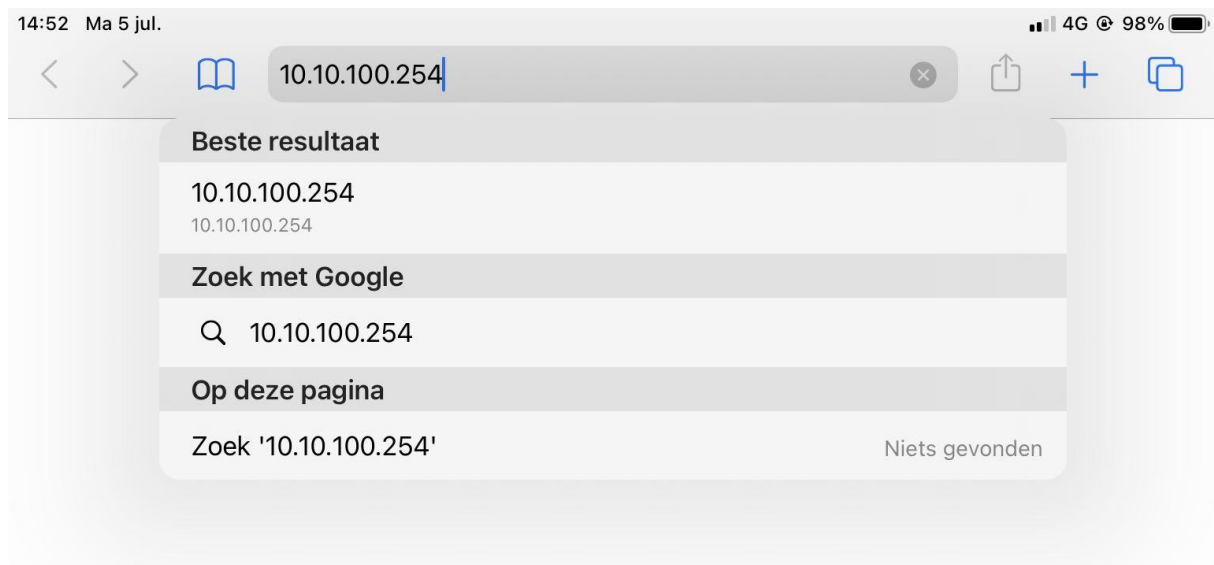


Stap 3

U komt op een inlogscherm, voer admin in als beide gebruikersnaam en wachtwoord.

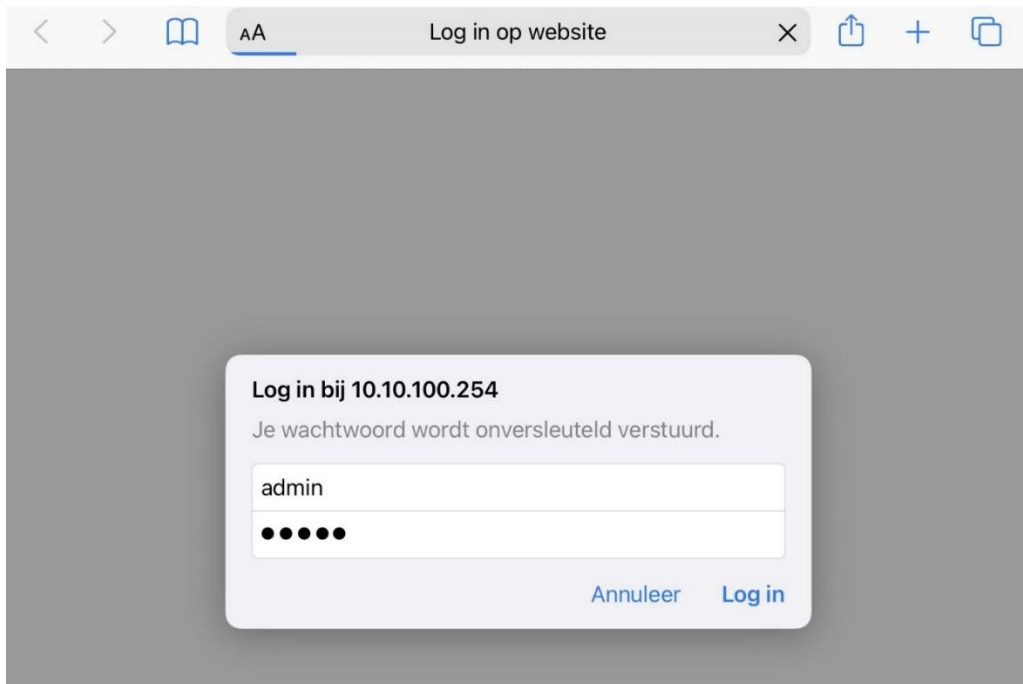

Stap 4

De volgende pagina verschijnt. Klik op "Start Setup".

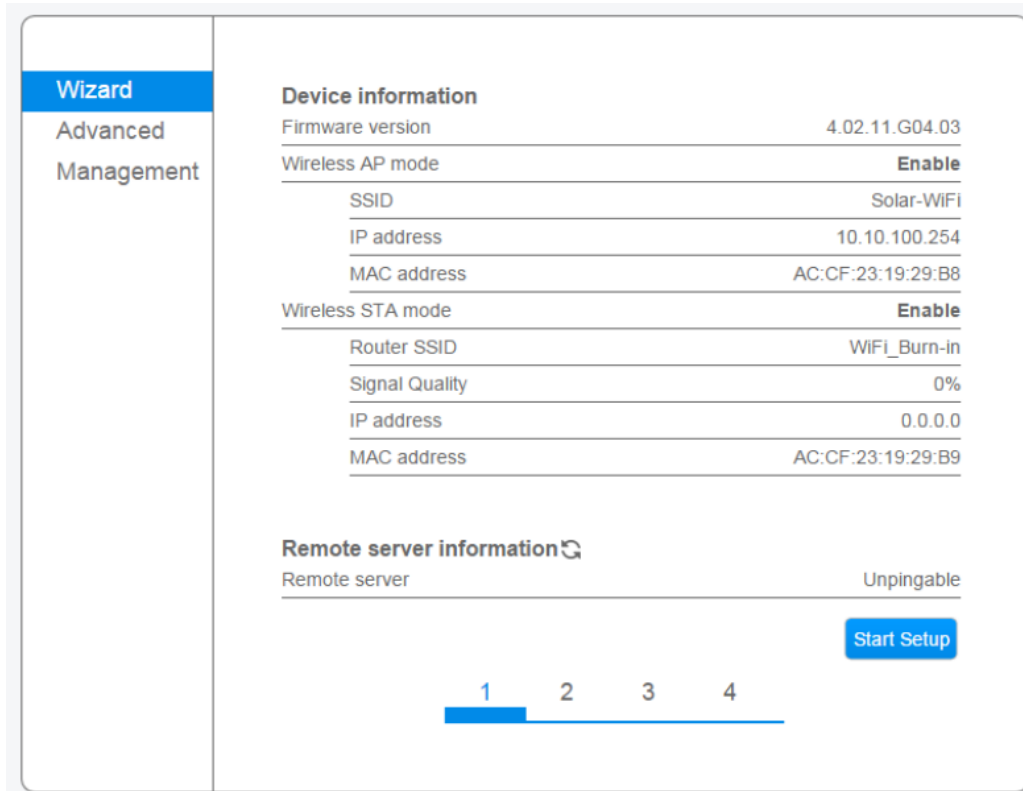

Stap 5

In de lijst die tevoorschijn komt, selecteer het Wi-Fi netwerk waarmee u de omvormer wilt verbinden. Als deze er niet tussen staat, klik dan op "Refresh".

Let op de RSSI kolom, dit is de signaal sterkte. Zorg dat hier een nummer hoger dan 15% staat. Als u uw netwerk niet kan vinden of als hier een te laag nummer staat, is de Wi-Fi verbinding niet sterk genoeg. U kunt eventueel een Wi-Fi repeater toepassen.

Als u een netwerk heeft geselecteerd klikt u op "Next".

The screenshot shows a web-based wizard interface for selecting a Wi-Fi network. On the left is a sidebar with 'Wizard' (highlighted), 'Advanced', and 'Management'. The main content area is titled 'Please select your current wireless network:' and contains a 'Site Survey' table. The table lists three networks: 'EASYCOLOR_23159310' (76% RSSI, channel 1, NONE encryption, OPEN method), 'natec-debrand' (100% RSSI, channel 2, AES encryption, WPA2PSK method), and 'DP' (86% RSSI, channel 11, AES encryption, WPA2PSK method). The 'natec-debrand' network is selected with a radio button. Below the table are 'Refresh', 'Back', and 'Next' buttons. A note states: '★Note: When RSSI of the selected WiFi network is lower than 15%, the connection may be unstable, please select other available network or shorten the distance between the device and router.' At the bottom, a progress bar shows four steps, with step 2 highlighted in blue.

SSID	RSSI	Channel	Encryption algorithm	Encryption method
<input type="radio"/> EASYCOLOR_23159310	76%	1	NONE	OPEN
<input checked="" type="radio"/> natec-debrand	100%	2	AES	WPA2PSK
<input type="radio"/> DP	86%	11	AES	WPA2PSK

Refresh

Back Next

★Note: When RSSI of the selected WiFi network is lower than 15%, the connection may be unstable, please select other available network or shorten the distance between the device and router.

1 2 3 4



Stap 6

In het volgende scherm kunt u het wachtwoord van uw Wi-Fi netwerk invullen bij "Password".

Als u het wachtwoord heeft ingevuld klikt u op "Next".

Wizard
Advanced Management

Add wireless network manually:

Network name (SSID)
(Note: case sensitive)

Encryption method

Encryption algorithm

Please enter the wireless network password:

Password (8-64 bytes)
(Note: case sensitive)

Show Password

Back Next

1 2 3 4

Stap 7

Klik in het volgende scherm op "OK" om de instellingen toe te passen. De omvormer zal herstarten om de Wi-Fi verbinding toe te passen.

Wizard
Advanced Management

Setting complete!

Click OK, the settings will take effect and the system will restart immediately.

If you leave this interface without clicking OK, the settings will be ineffective.

Back OK

1 2 3 4

